


CRT200 - Cable Retrieval Tool



- Hydraulically operated cable lifting tool for retrieval and decommissioning projects
- Corrosion resistant steel and stainless steel construction
- Mechanically locked gripping action to ensure cable cannot escape during retrieval
- Internal clutch mechanism to prevent overtightening
- Approx weight – 540kg
- Lifting/gripping capacity – 20 tonnes
- Jaw capacity – 6” to 8” diameter cable
- Can be used at any water depth
- Designed, manufactured and tested in accordance with DNV-GL standards
- Design Verified by DNV-GL
- Suitable for lifting cables and umbilical's
- Standard tool is shown above. Bespoke and custom designs to suit special applications are available on request

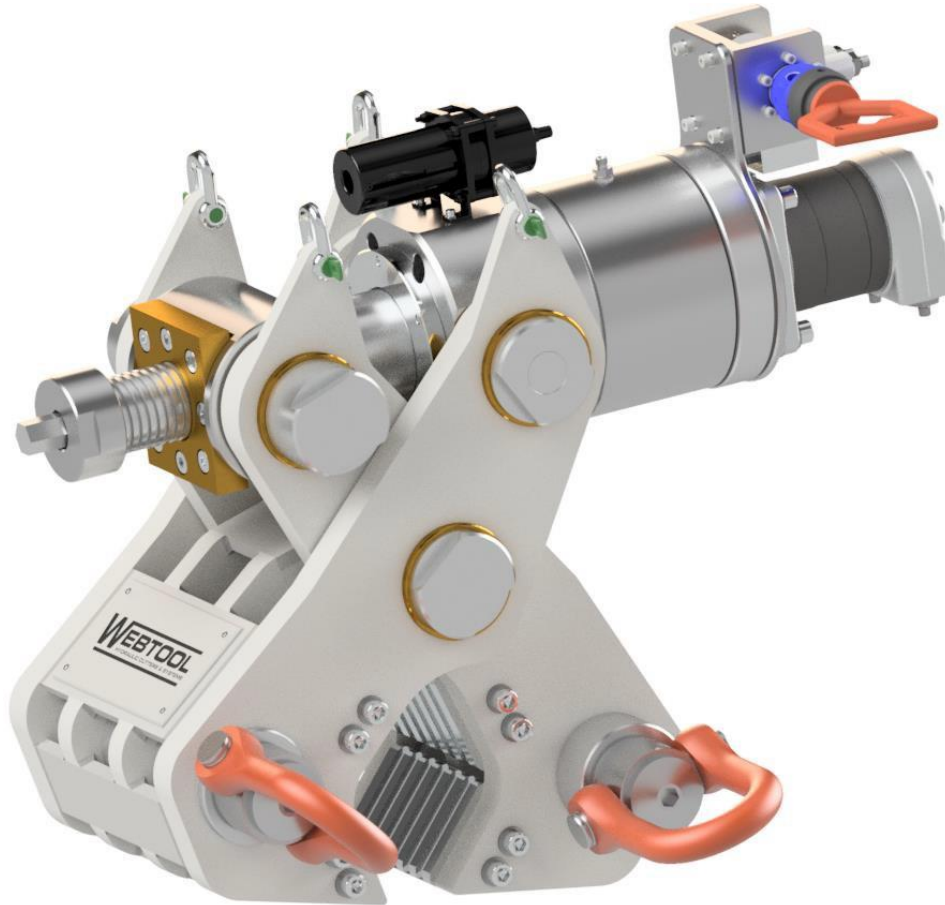

PHONE: 1.416.234.8671 **FAX:** 1.416.237.9279

EMAIL: info@webtool-subsea.com

61 Advance Rd., Unit 7, Toronto,
Ontario, Canada M8Z 2S6

WEBTOOL-SUBSEA.COM



Webtool is a Trademark of Allspeeds Ltd
Designed and Manufactured in the UK

Hydraulic systems specialist, Webtool, announces a gripping and lifting tool for recovering subsea umbilical and cable for offshore oil & gas and decommissioning projects. The Cable Retrieval Tool (CRT200), developed in consultation with international certification body and classification society, DNVGL, allows the safe and controlled recovery of damaged cable and umbilical, up to 8" (203 mm) diameter.

Current methods of recovering umbilical's for repair or replacement are laborious, time consuming and expensive. They involve trenching the seabed around the cable or umbilical to allow a double choke sling to be attached using a ROV. The hydraulically operated, Webtool CRT200 gripper offers a quicker and safer method of retrieval and improved handling.

The CRT200 cable gripper provides a streamlined cable recovery whereby the gripper, guided by an ROV, is lowered onto the end of the cable without requiring preliminary clearing of the soil around the cable. The mechanically locked gripping action ensures the umbilical cannot escape during retrieval; moreover, an internal clutch mechanism prevents damage from overtightening. By gripping the end of the cable, it makes subsequent handling much easier, enabling the cable to be recovered to a reeler / spooler on the surface vessel.

The tool design is verified by DNV-GL and has been proof load tested to 46 tonnes in accordance with DNV-GL industry safety factors.



PHONE: 1.416.234.8671 **FAX:** 1.416.237.9279

EMAIL: info@webtool-subsea.com

61 Advance Rd., Unit 7, Toronto,
Ontario, Canada M8Z 2S6

WEBTOOL-SUBSEA.COM

allspeeds

Webtool is a Trademark of Allspeeds Ltd
Designed and Manufactured in the UK